

# GLÖTZL Baumeßtechnik

## ELECTRIC MOTOR PUMP with ADDITIONAL UNIT

**Type: M 1 B 16**  
**ME 2/160 U**  
**Art. No.: 35.02.03**

Additional unit, type ME 1/160 U, for oil operation with 2 further measuring ranges, reversible  
Thus, 3 measuring ranges according to requirement are available, which enable a very high resolution of different measuring values.

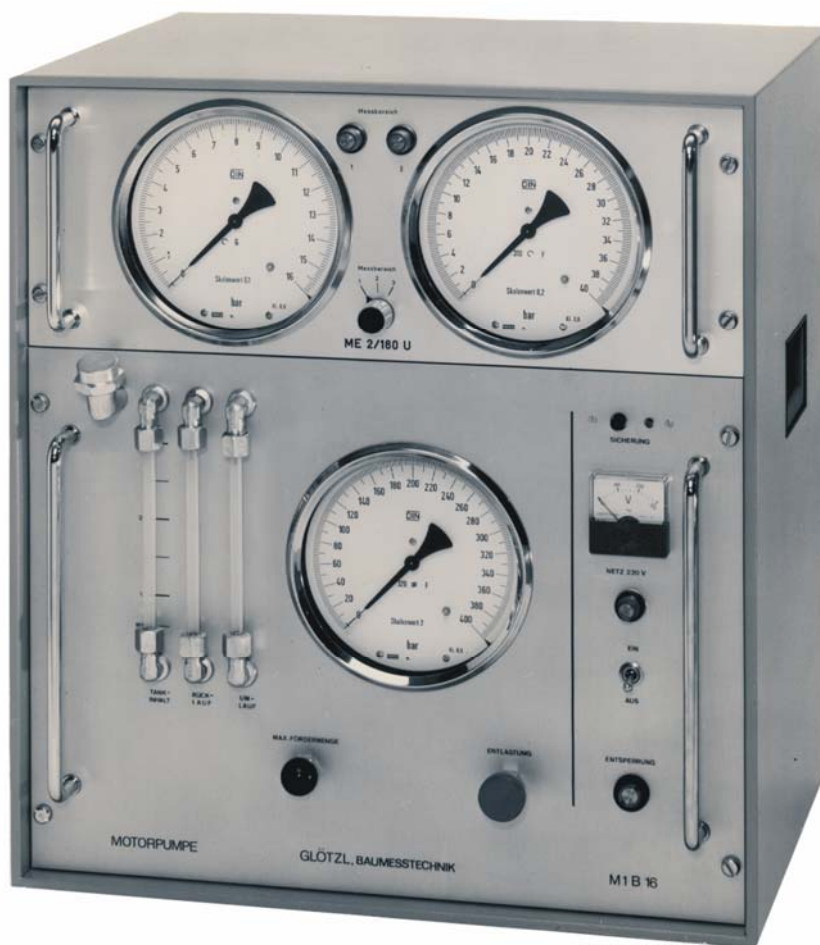


Figure: Additional unit  
ME2/160 U with  
motor pump

The additional unit is an efficient supplement to the motor pump with further measuring ranges and can only be used in connection with the pump.

**Measuring ranges:** Manometer Ø 160 mm, class 0.6, measuring range according to requirement  
0-2.5 / 4 / 6 / 10 / 16 / 25 / 40 / 60 / 100 / 160 / 250 / 400 or 600 bars

The largest measuring range is installed in the motor pump. All manometers are equipped with overpressure protection contacts and are thus protected against overload. The measuring ranges are switched over by magnetic valves.

Dimensions: Height: 550 mm, depth: 400 mm, width: 505 mm

Weight: With pump 45 kgs

Subject to technical alterations

**GLÖTZL Gesellschaft für Baumeßtechnik mbH** · Forlenweg 11 · 76287 Rheinstetten · Germany  
☎ +49 (0)721 51 66 - 0 · 📠 +49 (0)721 51 66 - 30 · 🌐 <http://www.gloetzl.com> · ✉ [info@gloetzl.com](mailto:info@gloetzl.com)